## 0117401: Operating System 操作系统原理与设计 Chapter 9: Virtual Memory(虚存)

陈香兰

xlanchen@ustc.edu.cn http://staff.ustc.edu.cn/~xlanchen

Computer Application Laboratory, CS, USTC @ Hefei Embedded System Laboratory, CS, USTC @ Suzhou

April 29, 2019

# 温馨提示:



为了您和他人的工作学习, 请在课堂上**关机或静音**。

不要在课堂上接打电话。

## 提纲

Background

Demand Paging (按需调页)

Copy-on-Write (写时复制)

Page Replacement (页面置换)

**Allocation of Frames** 

Thrashing (抖动)

**Memory-Mapped Files** 

**Allocating Kernel Memory** 

Other Issues

**Operating System Examples** 

## Outline

Background

- Instructions must be loaded into memory before execution.
- Solutions in chapter 8:

Program entire Physical memory

- ► Sometimes, **jobs** may be **too big** or **too many**. How to expand the main memory?
  - Physically? COST TOO HIGH!
  - ▶ Logically? √

- Virtual memory: Why and How?
  - Some code may get no, or only little, opportunity of execution,
    - for example, code for error handlers
  - Some data may get no opportunity of access
  - ► Locality of reference (程序的局部性原理), 1968, Denning
    - ► Temporal locality (时间局部性)
    - ▶ Spatial locality (空间局部性)
  - ► Idea: partly loading (部分装入)、demand loading (按需装入)、replacement (置换)

- Virtual Memory (虚拟存储器)是指具有请求调页功能和置换功能,能从逻辑上对内存容量加以扩充的一种存储器系统
  - Logical size:

从系统角度看:内存容量+外存容量 从进程角度看:地址总线宽度范围内;内存容量+外存容量

- Speed: close to main memory
- Cost per bit: close to secondary storage (disks)
- Virtual memory: separation of user logical memory from physical memory.
  - Only part of the program needs to be in memory for execution
  - Logical address space can therefore be much larger than physical address space
  - Allows address spaces to be shared by several processes
  - Allows for more efficient process creation



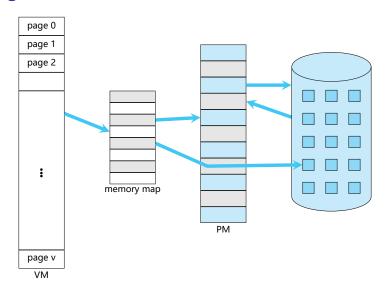


Diagram showing vritual memory that is larger than physical memory


- Virtual memory can be implemented via:
  - 1. Demand paging
    - Paging technology + pager (请求调页) and page replacement
    - Pager VS. swapper the unit of swapping in/out is not the entire process but page.
  - 2. Demand segmentation

## 虚拟存储器的特征

- 1. 多次性: 最重要的特征
  - ▶ 一个作业被分成多次装入内存运行
- 2. 对换性
  - ▶ 允许在进程运行的过程中, (部分)换入换出
- 3. 虚拟性
  - ▶ 逻辑 上的扩充
- ▶ 虚拟性是以多次性和对换性为基础的。
- ▶ 多次性和对换性是建立在离散分配的基础上的


# Virtual-address Space (虚拟地址空间)

- The virtual address space of a process refers to the logical (or virtual) view of how a process is stored in memory.
  - Typically: 0~xxx & exists in contiguous memory
- In fact, the physical memory are organized (partitioned) in page frames & the page frames assigned to a process may not be contiguous⇒MMU



### Some benefits

1. Shared library using virtual memory

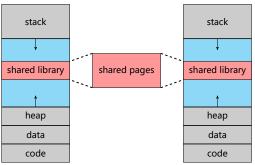

- 2. Shared memory
- 3. Speeding up process creation

#### **Outline**

Demand Paging (按需调页)


Basic Concepts (Hardware support) Performance of Demand Paging

## Demand Paging (按需调页)

- Do not load the entire program in physical memory at program execution time. NO NEED!
- Bring a page into memory only when it is needed
  - 1. Less I/O needed
  - 2. Less memory needed
  - 3. Faster response
  - 4. More users
- ▶ A page is **needed** ← Reference to it
  - ► Invalid reference ⇒Abort
  - Not-in-memory ⇒Bring to memory

## Demand Paging (按需调页)

- Swapper VS. Pager
  - ► A swapper manipulates the entire processes
  - Lazy swapper
     Never swaps a page into memory unless the page will be needed
    - Swapper that deals with individual pages is a pager

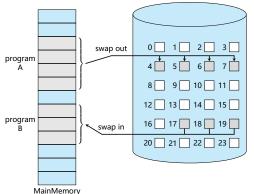

### **Outline**


Demand Paging (按需调页)
Basic Concepts (Hardware support)
Performance of Demand Paging

## Hardware support

- 1. The modified page table mechanism
- 2. Page fault
- 3. Address translation
- 4. Secondary memory (as swap space)


## 1) The modified page table mechanism

- 1. Valid-Invalid Bit (PRESENT bit)
  - With each page table entry a valid-invalid bit is associated
    - v ⇒ in-memory, i ⇒ not-in-memory
  - Initially valid-invalid bit is set to i on all entries
  - During address translation, if valid-invalid bit in page table entry is i
     ⇒ page fault
- 2. Reference bits (for pager out)
- 3. Modify bit (or dirty bit)
- 4. Secondary storage info (for pager in)




## 1) The modified page table mechanism

Page table when some pages are not in main memory

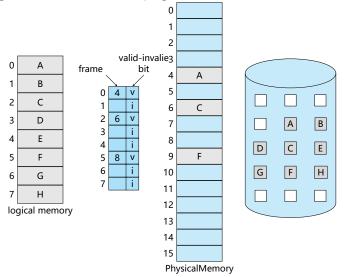

## 2) Page Fault (缺页故障)

- ► First reference to a page will trap to OS: page fault(缺页故障/异常/中断)
- ► Page fault trap (缺页异常)
  - ► Exact exception (trap), 精确异常 Restart the process in exactly the same place and state. Re-execute the instruction which triggered the trap
- Execution of one instruction may cause multiply page faults




- Page fault may occur at every memory reference
- One instruction may cause multiply page faults while fetching instruction or r/w operators

Example: One instruction and 6 page faults

# 2) Page Fault (缺页故障)

- ► Page Fault Handling:
  - 1. OS looks at an internal table to decide:
    - ► Invalid reference ⇒ abort
    - ▶ Just not in memory ⇒
  - 2. Get empty frame
  - 3. Swap page into frame
    - ▶ Pager out & pager in
  - 4. Modify the internal tables & Set validation bit = v
  - 5. Restart the instruction that caused the page fault

# 2) Page Fault (缺页故障)

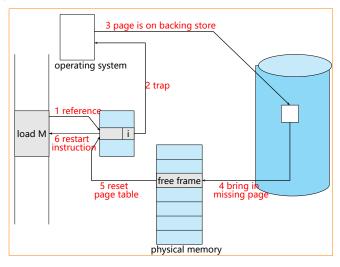

Steps in handling a page fault

## 3) address translation

Address translation hardware + page fault handling

#### Resume the execution

- ► Context save (保存现场)

  Before OS handling the page fault, the state of the process must be saved
  - Example: record its register values, PC
- ► Context restore (恢复现场)

  The saved state allows the process to be resumed from the line where it was interrupted.
- ▶ **NOTE:** distinguish the following 2 situation
  - ► Illegal reference⇒The process is terminated
  - ▶ Page fault⇒ Load in or pager in

#### **Outline**

Demand Paging (按需调页)

Basic Concepts (Hardware support)

Performance of Demand Paging

# Performance of Demand Paging

- ▶ Let  $p = Page Fault Rate (0 \le p \le 1.0)$ 
  - ▶ If p = 0, no page faults
  - If p = 1.0, every reference is a fault
- Effective Access Time (EAT)

EAT = 
$$(1 - p) \times$$
 memory access  
+p × page fault time

```
page fault time = page fault overhead
+swap page out
+swap page in
+restart overhead
```

# Performance of Demand Paging

- Example
  - ightharpoonup Memory access time = 200ns
  - ► Average page-fault service time = 8ms

EAT = 
$$(1 - p) \times 200 + p \times 8ms$$
  
=  $(1 - p) \times 200 + p \times 8,000,000$   
=  $200 + p \times 7,999,800$ 

1. If one access out of 1,000 causes a page fault, then

$$p = 0.001$$
  
EAT = 8,199.8ns = 8.2 $\mu$ s

This is a slowdown by a factor of  $\frac{8.2 \text{us}}{200 \text{ns}} = 40!!$ 



# Performance of Demand Paging

- Example
  - Memory access time = 200ns
  - Average page-fault service time = 8ms

$$\begin{aligned} \text{EAT} &= (1 - \textbf{p}) \times 200 + \textbf{p} \times 8 \text{ms} \\ &= (1 - \textbf{p}) \times 200 + \textbf{p} \times 8,000,000 \\ &= 200 + \textbf{p} \times 7,999,800 \end{aligned}$$

2. If we want performance degradation < 10%, then

$$\begin{aligned} \mathsf{EAT} &= 200 + \mathsf{p} \times 7,999,800 &< 200 \, (1+10\%) = 220 \\ \mathsf{p} \times 7,999,800 &< 20 \\ \mathsf{p} &< 20/7,999,800 \approx 0.0000025 \end{aligned}$$

## Method for better performance

### ► To keep the fault time low

- 1. Swap space, faster then file system
- 2. Only dirty page is swapped out, or
- 3. Demand paging only from the swap space, or
- Initially demand paging from the file system, swap out to swap space, and all subsequent paging from swap space
- Keep the fault rate extremely low
  - Localization of program executing
    - ► Time, space

### Outline

Copy-on-Write (写时复制)

#### **Process Creation**


- Virtual memory allows other benefits during process creation:
  - 1. Copy-on-Write (写时复制)
  - 2. Memory-Mapped Files (later)

## Copy-on-Write (写时复制)

- ► Copy-on-Write (COW, 写时复制)
  - allows both parent and child processes to initially share the same pages in memory
  - ► If either process **modifies** a shared page, only then is the page copied
- COW allows more efficient process creation as only modified pages are copied
- Free pages are allocated from a pool of zeroed-out pages

# Copy-on-Write (写时复制)


#### **Example:**

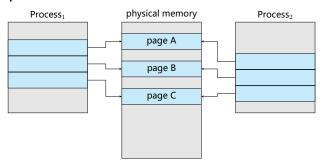

Before Process 1 Modifies Page C

# Copy-on-Write (写时复制)

#### **Example:**

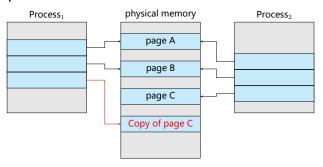

After Process 1 Modifies Page C

### **Outline**

### Page Replacement (页面置换)


Basic Page Replacement
First-In-First-Out (FIFO) Algorithm
Optimal Algorithm
Least Recently Used (LRU) Algorithm
LRU Approximation Algorithms
Counting Algorithms
Page-Buffeing Algorithms

## What happens if there is no free frame?

- ► Page replacement (页面置换)
  Find some page in memory, but not really in use, swap it out
  - Algorithm?
  - Performance? want an algorithm which will result in minimum number of page faults
  - Same page may be brought into memory several times

## Need of Page Replacement (页面置换) I

Over-allocation: No free frames; All memory is in use.

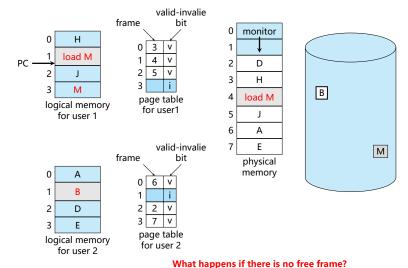

vilat happens if there is no free frame:

# Need of Page Replacement (页面置换) II

#### ► Solution:


Page replacement (页面置换) Prevent over-allocation of memory by modifying page-fault service routine to include page replacement

# Page Replacement (页面置换) Basic Page Replacement First-In-First-Out (FIFO) Algorithm Optimal Algorithm Least Recently Used (LRU) Algorithm LRU Approximation Algorithms Counting Algorithms Page-Buffeing Algorithms

## **Basic Page Replacement**

- Basic Page Replacement
  - 1. **Find** the location of the desired page on disk
  - 2. Find a free frame:
    - If there is a free frame, use it
    - If there is no free frame, use a page replacement algorithm to select a victim frame
  - 3. **Bring** the desired page into the (newly) free frame; **Update** the page and frame tables
  - 4. Restart the process

## **Basic Page Replacement**

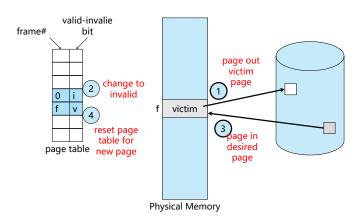

Page replacement

## **Basic Page Replacement**


- NO MODIFY, NO WRITTEN(to disk/swap space)
  - Use modify (dirty) bit to reduce overhead of page transfers
    - Only modified pages are written to disk
  - This technique also applies to read-only pages
    - For example, pages of binary code
- Page replacement completes separation between logical memory and physical memory
  - Large virtual memory can be provided on a smaller physical memory
- Demand paging, to lowest page-fault rate, two major problems
  - 1. Frame-allocation algorithms
  - 2. Page-replacement algorithms



- ► GOAL: to lowest page-fault rate
- ▶ Different algorithms are evaluated by running it on a particular string of memory references (reference string) and computing the number of page faults on that string
- A reference string is a sequence of addresses referenced by a program Example:
  - An address reference string:
     0100 0432 0101 0612 0102 0103 0104 0101 0611 0103 0104 0101 0610 0102 0103 0104 0101 0609 0102 0105
  - Assuming page size = 100 B, then its corresponding page reference string is: 1 4 1 6 1 6 1 6 1 6 1

- 2. How many page faults?
  - Determined by the number of page frames assigned to the process
  - For the upper example: 14161616161
    - ▶ If  $\geq 3$ , then only 3 page faults
    - If = 1, 11 pages faults

- 2. How many page faults?
  - Determined by the number of page frames assigned to the process
  - ► For the upper example: 14161616161
    - ▶ If  $\geq$  3, then only 3 page faults
    - lf = 1, 11 pages faults

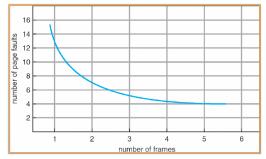

Graph of Page Faults Versus The Number of Frames

- ▶ In all our examples, the reference strings are
  - 1. 1, 2, 3, 4, 1, 2, 5, 1, 2, 3, 4, 5
  - 2. 7, 0, 1, 2, 0, 3, 0, 4, 2, 3, 0, 3, 2, 1, 2, 0, 1, 7, 0, 1

#### Page Replacement (页面置换)


Basic Page Replacement

First-In-First-Out (FIFO) Algorithm

Optimal Algorithm
Least Recently Used (LRU) Algorithm
LRU Approximation Algorithms
Counting Algorithms
Page-Buffeing Algorithms

## First-In-First-Out (FIFO) Algorithm


- The simplest page-replacement algorithm: FIFO
  - For each page: a time when it was brought into memory
  - For replacement: the oldest page is chosen
  - Data structure: a FIFO queue
    - Replace the page at the head of the queue
    - Insert a new page at the end of the queue
- 1. Example 1: 15 page faults, 12 page replacements




# First-In-First-Out (FIFO) Algorithm

2. Example 2: Reference string: 1, 2, 3, 4, 1, 2, 5, 1, 2, 3, 4, 5

Reference string



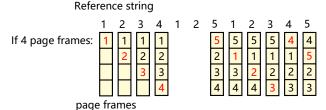


10 page faults



## First-In-First-Out (FIFO) Algorithm

- ► More memory, better performance? MAY BE NOT!!
  - Belady's anomaly (贝莱迪异常现象): more frames ⇒ more page faults

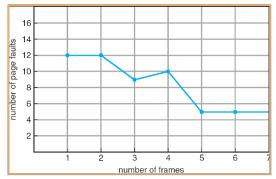


FIFO illustrating Belady's Anomaly

#### Page Replacement (页面置换)

Basic Page Replacement
First-In-First-Out (FIFO) Algorithm
Optimal Algorithm
Least Recently Used (LRU) Algorithm
LRU Approximation Algorithms
Counting Algorithms
Page-Buffeing Algorithms


# **Optimal Algorithm**

- Optimal page-replacement algorithm:
   Replace page that will not be used for longest period of time
  - ► It has the lowest page-fault rate
  - ► It will never suffer from Belady's anomaly
- Example1: 9 page faults, 6 page replacements



## **Optimal Algorithm**

4 frames example1, 2, 3, 4, 1, 2, 5, 1, 2, 3, 4, 5

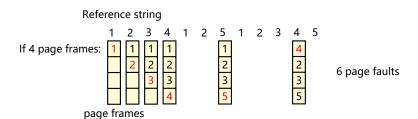

- ► OPT: Difficult to implement
  - ► How to know the future knowledge of the reference string?
- So, it is only used for measuring how well other algorithm performs




## Page Replacement (页面置换)


Basic Page Replacement
First-In-First-Out (FIFO) Algorithm
Optimal Algorithm
Least Recently Used (LRU) Algorithm
LRU Approximation Algorithms

LRU Approximation Algorithms
Counting Algorithms
Page-Buffeing Algorithms

- LRU: an approximation of the OPT algorighm
   Use the recent past as an approximation of the near future
  - To replace the page that has not been used for the longest period of time
  - ► For each page: a time of its last use
  - ► For replace: the oldest time value
- 1. Example1: 12 page faults; 9 page replacements



- LRU: an approximation of the OPT algorighm
   Use the recent past as an approximation of the near future
  - To replace the page that has not been used for the longest period of time
  - ► For each page: a time of its last use
  - ► For replace: the oldest time value
- 2. Reference string: 1, 2, 3, 4, 1, 2, 5, 1, 2, 3, 4, 5

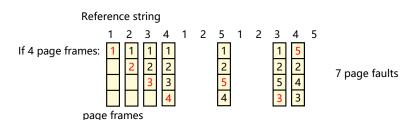


#### **HOW** to implement LRU replacement?

- 1. Counter implementation
  - Every page entry has a counter; every time page is referenced through this entry, copy the clock into the counter
  - When a page needs to be changed, look at the counters to determine which are to change

#### **HOW** to implement LRU replacement?

- 2. **Stack** implementation keep a stack of page numbers in a double link form:
  - When page referenced: Move it to the top
    - Requires 6 pointers to be changed
  - No search for replacement

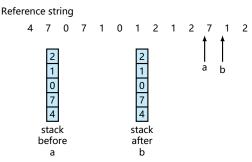

#### Page Replacement (页面置换)

Basic Page Replacement First-In-First-Out (FIFO) Algorithm Optimal Algorithm Least Recently Used (LRU) Algorithm

## **LRU Approximation Algorithms**

Counting Algorithms
Page-Buffeing Algorithms

#### Reference bit

- With each page associate a bit, initially = 0
- ▶ When page is referenced bit set to 1
- Replace the one which is 0 (if one exists)
  - We do not know the order, however
- 1. Additinal-Reference-Bits Algorithm:


Reference bits + time ordering, for example: 8 bits

- HW modifies the highest bit, only
- Periodically, right shift the 8 bits for each page
- ▶ 00000000, ..., 01110111, ..., 11000100, ..., 11111111

#### 2. Second chance (clock) Algorithm

- Need only 1 reference bit, modified FIFO algorithm
  - First, a page is selected by FIFO
  - Then, the reference bit of the page is checked: 0⇒replace it
    1→ pot replace it, get a second chance with ref
    - 1⇒not replace it, get a second chance with reference bit: 1→0, and time→current

- 2. Second chance (clock) Algorithm
  - ► Implementation: Clock replacement (Clock order)

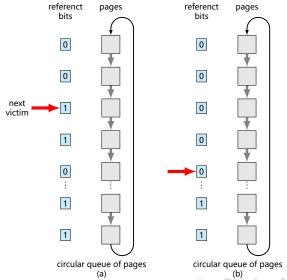

#### 3. Enhanced Second-Chance Algothm

- Reference bit + modify bit
- ▶ 4 page classes (访问位,修改位)
  - ► (0, 0) best page to replace
  - ► (0, 1) not quite as good
  - ► (1, 0) probably be used again soon
  - ▶ (1, 1) probably be used again soon, and be dirty
- Replace the first page encountered in the lowest nonempty class.
  - Step (a) Scan for (0, 0)
  - Step (b) Scan for (0, 1), & set reference bits to 0
  - Step (c) Loop back to step (a)

#### Page Replacement (页面置换)

Basic Page Replacement
First-In-First-Out (FIFO) Algorithm
Optimal Algorithm
Least Recently Used (LRU) Algorithm
LRU Approximation Algorithms
Counting Algorithms
Page-Buffeing Algorithms

## **Counting Algorithms**

- Counting algorithms: Keep a counter of the number of references that have been made to each page
- 1. LFU Algorithm: replaces page with smallest count
- 2. **MFU Algorithm**: based on the argument that the page with the smallest count was probably just brought in and has yet to be used

#### Page Replacement (页面置换)

Basic Page Replacement
First-In-First-Out (FIFO) Algorithm
Optimal Algorithm
Least Recently Used (LRU) Algorithm
LRU Approximation Algorithms
Counting Algorithms

Page-Buffeing Algorithms

# Page-Buffeing Algorithms

- System commonly keep a pool of free frames
- When replacement occurs, two frames are involved
  - 1. A free frame from the pool is allocated to the process
    - ► The desired page is read into the frame
  - 2. A viction frame is chosen
    - Written out later and the frame is added to the free pool
  - NO NEED to write out before read in
- 1. An expansion
  - Maintain a list of modified pages
  - When a paging device is idle, select a modified page, write it out, modify bit→0

# Page-Buffeing Algorithms

#### 2. Another modification

- Free frame with old page
- The old page can be reused
  - Less write out and less read in
- VAX/VMS
- Some UNIX: + second chance
- **>** ..

**Allocation of Frames** 

#### Allocation of Frames

- 1. Minimum number of pages
  - Each process needs minimum number of pages
  - Determined by ISA (Instruction-Set Architecture )
    - We must have enough frames to hold all the different pages that any single instruction can reference
  - Example: IBM 3706 pages to handle SS MOVE instruction:
    - Instruction is 6 bytes, might span 2 pages
    - 2 pages to handle from
    - 2 pages to handle to
- 2. Two major allocation schemes
  - Fixed allocation; priority allocation
- 3. Two replacement policy
  - Global vs. local

#### Allocation scheme 1: Fixed Allocation

#### 1. Equal allocation

For example, if there are 100 frames and 5 processes, give each process 20 frames.

```
\begin{array}{rcl} \text{frame number for any process} & = & \frac{m}{n} \\ & m & = & \text{total memory frames} \\ & n & = & \text{number of processes} \end{array}
```

## Allocation scheme 1: Fixed Allocation

#### 2. Proportional allocation

Allocate according to the size of process

example:

$$\begin{array}{lllll} \textbf{s}_{\textbf{i}} &=& \text{size of process p}_{\textbf{i}} & \textbf{m} &=& 64 \\ \textbf{S} &=& \Sigma \textbf{s}_{\textbf{i}} & \textbf{S}_{1} &=& 10 \\ \textbf{m} &=& \text{total number of frames} & \textbf{S}_{2} &=& 127 \\ \textbf{a}_{\textbf{i}} &=& \text{allocation for p}_{\textbf{i}} = \frac{\textbf{s}_{\textbf{i}}}{\textbf{S}} \times \textbf{m} & \textbf{a}_{1} &=& \frac{10}{137} \times 64 \approx 5 \\ \textbf{a}_{2} &=& \frac{127}{137} \times 64 \approx 59 \end{array}$$

# Allocation scheme 1: Priority Allocation

- Use a proportional allocation scheme using priorities rather than size
- If process P<sub>i</sub> generates a page fault,
  - 1. Select for replacement one of its frames
  - 2. Select for replacement a frame from a process with lower priority number

## Replacement policy: Global vs. Local Allocation

- Global replacement process selects a replacement frame from the set of all frames; one process can take a frame from another
  - Problem: a process cannot control its own page-fault rate
- ► Local replacement each process selects from only its own set of allocated frames
  - Problem?

#### Thrashing (抖动)

Cause of trashing Working-Set Model (工作集模型) Page-Fault Frequency (缺页频率)


# Thrashing (抖动)

Cause of trashing


Working-Set Model (工作集模型) Page-Fault Frequency (缺页频率)

- ▶ If a process does not have "enough" pages, the page-fault rate is very high. This leads to:
  - Low CPU utilization
  - OS thinks that it needs to increase the degree of multiprogramming
  - Another process added to the system, getting worse!
- ► Thrashing = a process is busy swapping pages in and out

 Cause of trashing: unreasonable degree of multiprogramming (不合理的多道程序度)

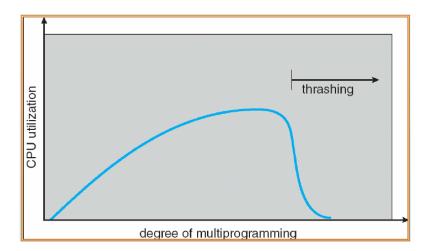

- How to limit the effects of thrashing
  - Local replacement algorithm? not entirely sloved.
  - We must provide a process with as many frames as it needs-locality
  - How do we know how many frames is needed?
    - ▶ working-set strategy ←Locality model
- Locality model: This is the reason why demand paging works
  - 1. Process migrates from one locality to another
  - 2. Localities may overlap
- Why does thrashing occur? ∑size of locality > total memory size

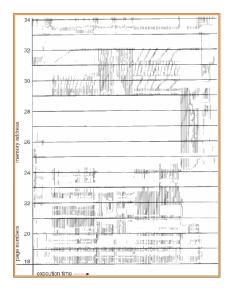

Locality In A Memory-Reference Pattern

#### Thrashing (抖动)

Cause of trashing

Working-Set Model (工作集模型)

Page-Fault Frequency (缺页频率)

## Working-Set Model (工作集模型)

- The working-set model is based on the assumption of locality.
- let


 $\Delta \equiv$  working – set window  $\equiv$  a fixed number of page references

For example: 10,000 instructions

- Working set (工作集):
  The set of pages in the most recent △ page references.
  - An approximation of the program's locality.

## Working-Set Model (工作集模型)

**Example:**  $\Delta = 10$ 



**▶** Working set size:

WSS<sub>i</sub>(working set of Process P<sub>i</sub>)

- = total number of pages referenced in the most recent  $\Delta$
- **Varies** in time, depend on the selection of  $\Delta$ 
  - 1. if  $\Delta$  too small will not encompass entire locality
  - 2. if  $\Delta$  too large will encompass several localities
  - 3. if  $\Delta = \infty \Rightarrow$  will encompass entire program

# Working-Set Model (工作集模型)

For all processes in the system, currently

$$D = \Sigma WSS_i \equiv total demand frames$$

- ightharpoonup D > m  $\Rightarrow$  Thrashing
- Policy:
  if D > m, then suspend one of the processes

# Keeping Track of the Working Set


- Approximate with: interval timer + reference bits
- ► Example:  $\Delta = 10,000$ 
  - Timer interrupts after every 5000 time units
  - Keep in memory 2 bits for each page
  - ► Whenever a timer interrupts, copy and sets the values of all reference bits to 0
  - ▶ If one of the bits in memory =  $1 \Rightarrow$  page in working set
- Why is this not completely accurate?
  - IN!! But where?
- Improvement:
  - 10 bits and interrupt every 1000 time units

#### Thrashing (抖动)


Cause of trashing Working-Set Model (工作集模型) Page-Fault Frequency (缺页频率)

## Page-Fault Frequency Scheme

- Page-Fault Frequency: helpful for controlling trashing
  - Trashing has a high page-fault rate.
  - Establish "acceptable" page-fault rate
    - ► If actual rate too low, process loses frame
    - ▶ If actual rate too high, process gains frame

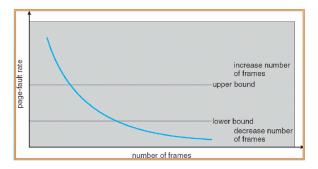

# Working sets and page fault rates

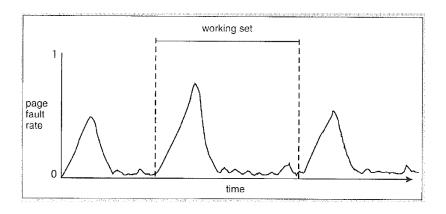


**Memory-Mapped Files** 

## **Memory-Mapped Files**


- Memory-mapped file I/O allows file I/O to be treated as routine memory access by mapping a disk block to a page in memory
- A file is initially read using demand paging. A page-sized portion of the file is read from the file system into a physical page. Subsequent reads/writes to/from the file are treated as ordinary memory accesses.
- Simplifies file access by treating file I/O through memory rather than read() write() system calls

## Memory-Mapped Files

► Also allows several processes to map the same file allowing the pages in memory to be shared.

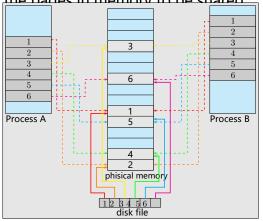

# Shared Memory in Windows using Memory-Mapped I/O

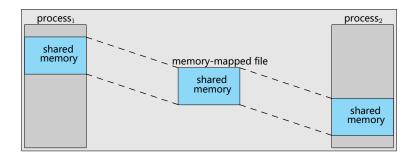

## Memory - mapped I/O

- Many computer architectures provide memory-mapped I/O
  - Ranges of memory addresses are set aside and are mapped to the device registers.
  - Directly read/write the mapped range of memory address for transfer data from/to device registers
  - Fast response times
  - For example: video controler
    - Displaying text on the screen is almost as easy as writing the text into the appropriate memory-mapped locations.


Allocating Kernel Memory

# **Allocating Kernel Memory**

- Kernel memory Treated differently from user memory
  - Process' s logical (virtual) address space VS. kernel address space
    - different privilege
    - allow page fault or not?
- Often allocated from a free-memory pool
  - Kernel requests memory for structures of varying sizes
  - Some kernel memory needs to be contiguous
- 1. Buddy system (伙伴系统)
- 2. Slab allocator (slab分配器)


# 1. Buddy System (伙伴系统)

- Allocates memory from fixed-size segment consisting of physically-contiguous pages
- Memory allocated using power-of-2 allocator
  - Satisfies requests in units sized as power of 2
  - ► Request **rounded up** to next highest power of 2
  - When smaller allocation needed than current size is available, current chunk split into two buddies of next-lower power of 2, continue until appropriate sized chunk available chunk available contiquous pages



# 2. Slab Allocator (slab分配器) I

Slab allocator: Alternate strategy

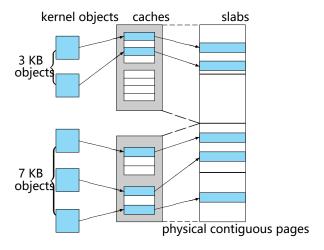

Slab is one or more physically contiguous pages



## 2. Slab Allocator (slab分配器) II

- Cache consists of one or more slabs
- Single cache for each unique kernel data structure
  - Each cache filled with objects instantiations of the data structure
- When cache created, filled with objects marked as free
- When structures stored, objects marked as used
- If slab is full of used objects, next object allocated from empty slab
  - If no empty slabs, new slab allocated
- Benefits: no fragmentation, fast memory request satisfaction

Other Issues

#### 1. Prepaging

- To reduce the large number of page faults that occurs at process startup
- Prepage all or some of the pages a process will need, before they are referenced
- But if prepaged pages are unused, I/O and memory was wasted
- Assume s pages are prepaged and  $\alpha$  of the pages is used
  - ▶ Is cost of  $s * \alpha$  save pages faults > or < than the cost of prepaging  $s * (1 \alpha)$  unnecessary pages?
  - $ightharpoonup \alpha$  near zero  $\Rightarrow$  prepaging loses

#### 2. Page Size

- Page size selection must take into consideration:
  - 2.1 Fragmentation
  - 2.2 Table size
  - 2.3 I/O overhead
  - 2.4 Locality



- 3. **TLB Reach** The amount of memory accessible from the TLB
  - ► TLB Reach = (TLB Size)  $\times$  (Page Size)
    - Ideally, the working set of each process is stored in the TLB,
       Otherwise there is a high degree of page faults
    - Increase the Page Size.
      This may lead to an increase in fragmentation as not all applications require a large page size
    - Provide Multiple Page Sizes. This allows applications that require larger page sizes the opportunity to use them without an increase in fragmentation

#### 4. Inverted page tables

- ▶ This can reduce the memory used to store page tables.
- Need an external page table (one per process) for the infomation of the logical address space

#### 5. Program structure

int[128,128] data; // Each row is stored in one page

#### Program 1


for 
$$(j = 0; j < 128; j++)$$
  
for  $(i = 0; i < 128; i++)$   
data $[i,j] = 0;$ 

► 128 x 128 = 16,384 page faults

#### Program 2

▶ 128 page faults

- I/O Interlock Pages must sometimes be locked into memory
  - Consider I/O Pages that are used for copying a file from a device must be locked from being selected for eviction by a page replacement algorithm



Reason why frames used for I/O must be in memory

**Operating System Examples** 

# **Operating System Examples**

- Windows XP
- Solaris

#### Windows XP


- Uses demand paging with clustering. Clustering brings in pages surrounding the faulting page.
- Processes are assigned working set minimum and working set maximum
  - ▶ 50~345 pages
  - Working set minimum is the minimum number of pages the process is guaranteed to have in memory,
  - A process may be assigned as many pages up to its working set maximum
  - When page fault:
    - if < working set maximum, allocates a new page</p>
    - ▶ if =max, uses local page-replacement policy
- When the amount of free memory in the system falls below a threshold, automatic working set trimming is performed to restore the amount of free memory
  - Working set trimming removes pages from processes that have pages in excess of their working set minimum



#### Solaris I

- Maintains a list of free pages to assign faulting processes
  - Parameter lotsfree
     – threshold (amount of free memory) to begin paging, 1/64 the size of physical memory
  - check the amount of free pages 4 times per second
- Paging is performed by pageout process using modified second-chance algorithm (with two hands)
  - Desfree– threshold parameter to increasing paging
  - Minfree– threshold parameter to being swapping
  - Scanrate is the rate at which pages are scanned. This ranges from slowscan to fastscan
  - Pageout is called more frequently depending upon the amount of free memory available

## Solaris II

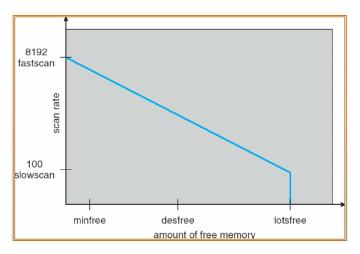

Solaris 2 page scanner

小结和作业

## 小结

Background

Demand Paging (按需调页)

Copy-on-Write (写时复制)

Page Replacement (页面置换)

**Allocation of Frames** 

Thrashing (抖动)

**Memory-Mapped Files** 

**Allocating Kernel Memory** 

Other Issues

**Operating System Examples** 

"纸上得来终觉浅,绝知此事要躬行"——宋·陆游《冬夜读书示子聿·选一》

谢谢!